



Figure similar

### MLFB-Ordering data

6SL3210-1PE11-8UL1

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data		General tech. specifications	
<b>Input</b>		<b>Power factor <math>\lambda</math></b>	0.85
Number of phases	3 AC	<b>Offset factor <math>\cos \varphi</math></b>	0.95
Line voltage	380 ... 480 V $\pm 10\%$	<b>Efficiency <math>\eta</math></b>	0.96
Line frequency	47 ... 63 Hz	<b>Sound pressure level (1m)</b>	72 dB
Rated current (LO)	2.30 A	<b>Power loss</b>	0.04 kW
Rated current (HO)	2.00 A	<b>Ambient conditions</b>	
<b>Output</b>		<b>Cooling</b>	Internal air cooling
Number of phases	3 AC	<b>Cooling air requirement</b>	0.005 m <sup>3</sup> /s (0.177 ft <sup>3</sup> /s)
Rated voltage	400 V	<b>Installation altitude</b>	1000 m (3280.84 ft)
Rated current (LO)	1.70 A	<b>Ambient temperature</b>	
Rated current (HO)	1.30 A	<b>Operation LO</b>	-5 ... 40 °C (23 ... 104 °F)
Max. output current	2.60 A	<b>Operation HO</b>	-5 ... 50 °C (23 ... 122 °F)
Rated power IEC 400V (LO)	0.55 kW	<b>Transport</b>	-25 ... 55 °C (-13 ... 131 °F)
Rated power NEC 480V (LO)	0.75 hp	<b>Storage</b>	-25 ... 55 °C (-13 ... 131 °F)
Rated power IEC 400V (HO)	0.37 kW	<b>Relative humidity</b>	
Rated power NEC 480V (HO)	0.50 hp	<b>Max. operation</b>	95 % RH, condensation not permitted
Pulse frequency	4 kHz		
Output frequency for vector control	0 ... 200 Hz		
Output frequency for V/f control	0 ... 550 Hz		

### Overload capability

#### Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

#### High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s



Figure similar

MLFB-Ordering data

6SL3210-1PE11-8UL1

### Mechanical data

Degree of protection	IP20 / UL open type
Size	FSA
Net weight	1.40 kg (3.09 lb)
Width	73 mm (2.87 in)
Height	196 mm (7.72 in)
Depth	165 mm (6.50 in)

### Connections

#### Line side


Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm <sup>2</sup> (AWG 18 ... AWG 14)

#### Motor end

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm <sup>2</sup> (AWG 18 ... AWG 14)

### Converter losses to EN 50598-2\*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-79.11 %

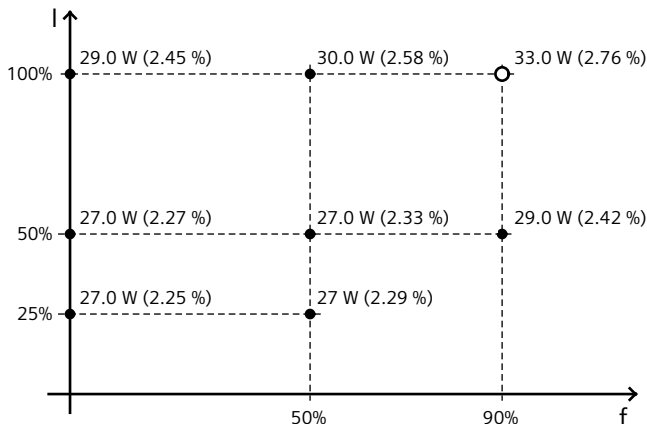

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

### Max. motor cable length

Shielded	50 m (164.04 ft)
Unshielded	100 m (328.08 ft)

### Standards

Compliance with standards: UL, cUL, CE, C-Tick (RCM), SEMI F47

CE marking: Low-voltage directive 2006/95/EC